Plug removal necessary for fuse replacement

with fuseholder

with fuseholder and neon indicator

F

70° C

Description

- Panel Mount:
  Snap-In Version from front side
- 3 Functions:
  Outlet shuttered Protection class I, Fuseholder for fuse-links 5 x 20 mm 1-pole, with or without neon indicator
- Solder terminals 3.8 x 0.8 mm

Characteristics

- With internal connections, except neon indicator to allow for different configurations
  Neon indicator with wire terminals
- With slotted screw type fuseholder
  Fuse drawer meets requirements of medical standard IEC/EN 60601-1
  The fuse drawer can only be opened with the aid of a tool
  The fuseholder is accessible from the equipment front
- Qualified for use in equipment according IEC/EN 60950

Other versions on request

- for protection class II

Technical Data

Ratings IEC	10 A / 250 VAC; 50 Hz
Ratings UL/CSA	10 A / 250 VAC; 60 Hz
Dielectric Strength	> 2.5 kVAC between L-N > 3 kVAC between L/N-PE (1 min/50 Hz)
Allowable operation temp.	-25 °C to 70 °C
Degree of Protection	from front side IP 40 acc. to IEC 60529
Protection Class	Suitable for appliances with protection class I acc. to IEC 61140
Terminals	Solder terminals 3.8 x 0.8 mm except neon indicator
Panel Thickness s	Snap-In: 1/1.2/1.5/2/2.5/3 mm
Material: Housing	Thermoplastic, Black, UL 94V-0

Appliance-inlet /-outlet	F acc. to IEC/EN 60320-2-2, UL 498, CSA C22.2 no. 42 (for cold condition) pin-temperature 70 °C, 10 A, Protection class I
Fuseholder	1-pole, Shocksafe category PC2 acc. to IEC 60127-6, for fuse-links 5 x 20 mm
Rated Power Acceptance @ Ta 23 °C	5 x 20: 1.6 W (1-pole)
Power acceptance @ Ta > 23°C	Admissible power acceptance at higher ambient temperature see derating curves. Take note of the information POWER ENTRY MODULES WITHOUT LINE FILTER

Dimensions

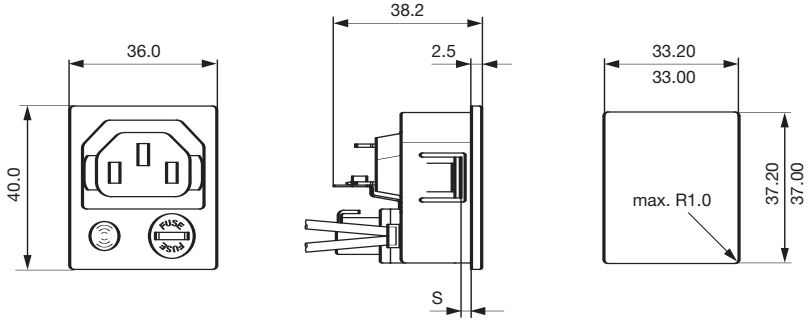

Diagrams



version without neon indicator

Derating curves



Variants

Socket and fuse-carrier

Order Number	Panel Thickness s [mm]	Neon indication
4719.3300	1	●
4719.8300	1.2	●
4719.4300	1.5	●
4719.5300	2	●
4719.6300	2.5	●
4719.7300	3	●
4719.3310	1	
4719.8310	1.2	
4719.4310	1.5	
4719.5310	2	
4719.6310	2.5	
4719.7310	3	

Packaging unit 100 Pcs